



# **2-Port SuperSpeed USB 3.0 PCI-e Host Card**

**User's Manual**  
**Model: UGT-PC302**

All brand names and trademarks are properties of their respective owners.

**www.vantecusa.com**

## ***Description***

The Vantec 2-Port PCI-e SuperSpeed USB 3.0 Host Card upgrades any desktop computer to the newest USB 3.0 standard. Integrated with the latest SuperSpeed USB 3.0 technology, transferring files to an USB 3.0 external hard disk is faster than ever with transfer speeds of up to 5Gbps. Back up important data such as HD video, high resolution photos to an external USB 3.0 in a fraction amount of time. Backwards compatible, the 2-Port PCI-e SuperSpeed USB 3.0 Host Card allows the use of USB 2.0 and USB 1.1 devices making this card truly versatile. Upgrading your computer to the newest USB 3.0 technology has never been so easy with the Vantec 2-Port PCI-e SuperSpeed USB 3.0 Host Card.

## ***Features and Benefits***

- Blazing Fast Transfer Speeds of up to 5Gbps
- 10x Faster than USB 2.0
- Two USB 3.0 Ports to Support Multiple Devices
- Supports Hot-Swap: Plug & Play Devices without Rebooting
- Backwards Compatible with USB 2.0 and 1.1 Devices
- Low Profile Card Makes Installing to Any Desktop an Easy Task

## ***Ports***

<b>Model:</b>	UGT-PC302
<b>Ports:</b>	2 x External USB 3.0 Ports (Backwards Compatible with USB 2.0 & 1.1)
<b>Power:</b>	15-pin SATA Power Connector (Required)
<b>Dimensions:</b>	67 x 120 x 20mm
<b>OS Support</b>	Microsoft Windows ® XP/Vista/7

## ***System Requirements***


- Windows® XP, Vista, & 7 32/64 bit
- PCI Express Enabled Computer System w/ Available PCI Express Slot
- Available PCI-e slot

## ***Package Contents***

- 1 x 2-Port SuperSpeed USB 3.0 PCI-e Host Card
- 1 x User's Manual
- 1 x Driver CD
- 1 x Low Profile Bracket

## Layout

Before installing the Vantec 2-Port SuperSpeed USB 3.0 PCI-e Host Card, please see the photo below highlighting the available USB 3.0 ports of the card.

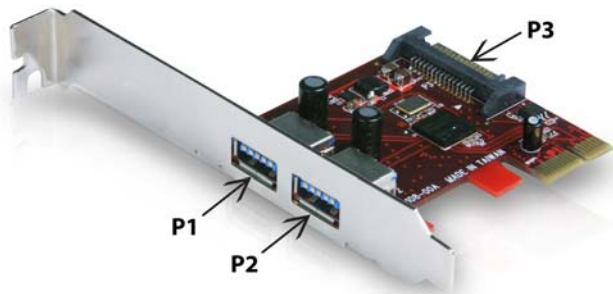

**P1 & P2: USB 3.0 Ports**  
**P3: SATA Power Port**

***Note: Make sure to connect a SATA power to P3 as additional power is required to function.***

## Hardware Installation

1. Turn off and unplug the power cable from the back of the

computer as well as any other attached devices.

2. Remove the cover to access the internal hardware of the computer (refer to the manufacture of the computer system/case documentation for more details).
3. Locate a free PCI Express slot and remove the metal cover plate on the rear of the computer case. (2-Port PCI-e SuperSpeed USB 3.0 Host Card will fit and work with any PCI Express slot whether it be a x1, x4, x8, x16 slot. Performance may vary with each slot.)
4. When installing the 2-Port PCI-e SuperSpeed USB 3.0 Host Card, make sure to fasten the bracket as documented in your manufacture's documentation.
5. Be sure to connect the SATA power connector from the power supply to the card as it does require additional power to function properly.
6. Place the case cover back onto the computer.
7. Reattach the power and other devices back to the computer.

## ***Driver Installation***

1. When you are booting up the computer for the first time with the new hardware installed, Windows will display the 'Found

New Hardware Wizard'.

2. Cancel the automatic driver installation and run the Setup.exe located on the Driver CD.

*Note: Setup.exe can also be found and downloaded from our website at [www.vantecusa.com](http://www.vantecusa.com).*

3. Run installer setup.exe on Driver CD "X:\UGT-PC302\" to have the latest driver for 32/64bit Windows. (where X is the drive path for your CD-ROM drive)
4. When installation of the driver is complete, please reboot the system as prompted to complete the driver installation.

*Note: When drivers have been successfully installed, you may check if installation was successful within the Device Manager where "NEC Electronics USB 3.0 Host Controller" will be shown.*

## **Warranty**

The 2-Port SuperSpeed USB 3.0 PCI-e Host Card comes with a 1 year limited warranty (90 day parts). If your unit becomes defective within that time frame, please go to [www.vantecusa.com](http://www.vantecusa.com) for information on how to receive warranty exchange or repair. Cosmetic defects and missing parts are not covered under this warranty. Please check the contents of the unit to make sure you received all parts. Also, check for any cosmetic flaws. If any parts are missing or if there are cosmetic defects, please contact the retailer from which you purchased the unit immediately and ask for a replacement.

### **Vantec Thermal Technologies**

43951 Boscell Rd. Fremont, CA 94538

tel: 510-668-0368 fax: 510-668-0367

*website: [www.vantecusa.com](http://www.vantecusa.com)*